

PATENT

81863.0007

Express Mail Label No. EL 589 806 978 US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Daisuke SHIBATA

Serial No: Not Assigned

Filed: December 11, 2000

For: Cutting Member

Art Unit: Not Assigned

Examiner: Not Assigned

RECEIVED
SEP 15 2003
TECHNOLOGY CENTER 1700

TRANSMITTAL OF PRIORITY DOCUMENT

Box Patent Applications
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Enclosed herewith is a certified copy of Japanese patent application No. 11-366486 which was filed December 24, 1999, from which priority is claimed under 35 U.S.C. § 119 and Rule 55.

Acknowledgment of the priority document(s) is respectfully requested to ensure that the subject information appears on the printed patent.

Respectfully submitted,

HOGAN & HARTSON L.L.P.

Date: December 11, 2000

By: 

Louis A. Mok, Esq.
Registration No. 22,585
Attorney for Applicant(s)

500 South Grand Avenue, Suite 1900
Los Angeles, California 90071
Telephone: 213-337-6700
Facsimile: 213-337-6701

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

日 本 国 特 許 庁
PATENT OFFICE
JAPANESE GOVERNMENT

別紙添付の書類に記載されている事項は下記の出願書類に記載されて
いる事項と同一であることを証明する。

This is to certify that the annexed is a true copy of the following application as filed
in this Office.

出 願 年 月 日
Date of Application:

1 9 9 9 年 1 2 月 2 4 日

出 願 番 号
Application Number:

平成 1 1 年 特 許 願 第 3 6 6 4 8 6 号


出 願 人
Applicant (s):

京セラ株式会社

2 0 0 0 年 8 月 4 日

特 許 庁 長 官
Commissioner,
Patent Office

及 川 耕 造



出 証 番 号 出 証 特 2 0 0 0 - 3 0 6 1 3 1 0

CUTTING MEMBER

THE FIELD OF THE INVENTION

The present invention relates to a cutting member such
5 as cutting tool, made of a high-strength and high-toughness
tungsten carbide (WC) cemented carbide which has high wear
resistance and high plastic deformation resistance and is
particularly suited for cutting hardly machinable materials
such as stainless steel which is hard to machine.

10

BACKGROUND OF THE INVENTION

As cemented carbides which have widely been used for
cutting metals, there has hitherto been known a WC-Co alloy
comprising a hard phase containing WC as a principal
15 component and a bond phase made of a metal of the iron group
such as cobalt, or an alloy obtained by adding carbides,
nitrides or carbonitrides of metals of the groups 4a, 5a
and 6a in the Periodic Table to the WC-Co alloy. In the
latter case, grains of the solid solution of WC and carbides,
20 nitrides and carbonitrides of metals of the groups 4a, 5a
and 6a in the Periodic Table are added to the hard phase
and bond phase.

These cemented carbides are principally utilized as
a cutting tool for cutting cast irons and carbon steels,
25 and are also utilized extensively for cutting stainless

steels, recently. Stainless steels have been used in various fields because of characteristics such as excellent corrosion resistance, oxidation resistance and heat resistance, and the amount of them to be machined have been
5 increased every year.

However, it has been known that stainless steels are typical hardly machinable materials because of properties such as easy occurrence of work hardening, low thermal conductivity and high affinity with tool materials.

10 Among WC cemented carbides for cutting tool, cemented carbides classified into so-called M series in accordance with JIS B 4053 (1996) are generally used to cut stainless steels. WC-TiC-Ta(Nb)C-Co cemented carbides are principally used in M series, and further TiC and Ta(Nb)C
15 are added in a comparatively small amount to provide the cutting tool with the toughness.

However, even in case the stainless steel is cut by using a cutting tool made of a conventional cemented carbide of M series, it is hard to satisfactorily cut for a long
20 time because of large wear amount of the cutting tool and short service life of the tool.

In addition, severe plastic deformation at the primary boundary portion is caused by a cutting resistance from the machined surface that is work-hardened during the cutting
25 of the stainless steel, thus reducing service life of the

tool.

SUMMARY OF THE INVENTION

A main object of the present invention is to provide
5 a cutting member wherein the wear resistance and plastic deformation resistance are improved even in case of cutting hardly machinable materials such as stainless steel, thereby resulting in long service life of the tool.

Another object of the present invention is to provide
10 a cutting member having improved chipping resistance.

The present inventors have intensively studied to attain the objects described above. As a result, they found a new fact that, in case a solid solution having a high Nb or Zr content is precipitated and dispersed in the structure
15 of a WC cemented carbide, it is made possible to obtain a cutting member which has an excellent mechanical strength because of high hardness of the precipitate and also has excellent wear resistance and plastic deformation resistance even in case of cutting hardly machinable
20 materials such as stainless steel.

In case of a conventional cutting tool, chipping that may be caused by the adhesion of the material to be cut to the tool surface occurs, thereby making the machined surface of the material to be cut worse. However, according to the
25 present invention, it is made possible to strengthen the

cemented carbide itself by precipitating and dispersing a solid solution having a high Nb or Zr content and to improve the chipping resistance.

According to the present invention, there is provided
5 a cutting member comprising WC, two or more solid solutions of WC and compounds selected from carbides, nitrides and carbonitrides of metals of the groups 4a, 5a and 6a in the Periodic Table, and at least one metal of the iron group; and at least one of two or more solid solutions being a solid
10 solution having a high Nb or Zr content.

The other objects and advantages of the present invention will become apparent from the following detailed description.

15 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a graph showing X-ray diffraction of a solid solution having a high Zr content obtained in the sample No. 4.

Fig. 2 is a graph showing X-ray diffraction of a solid
20 solution having a high Nb content obtained in the sample No. 7.

DETAILED DESCRIPTION OF THE INVENTION

One embodiment of the present invention will now be
25 described. The cemented carbide constituting the cutting

tool of the present invention is composed of a hard phase and a bond phase. The hard phase contains WC, and two or more solid solutions (complex carbide solid solution, complex nitride solid solution, or complex carbonitride solid solution) of said WC and carbides, nitrides or carbonitrides of metals of the groups 4a, 5a and 6a in the Periodic Table. The bond phase contains, as a principal component, a metal of the iron group such as Co and is preferably contained in the cemented carbide in the proportion within a range from 5 to 15% by weight. When the proportion of the bond phase is higher than the above range, the hardness and compressive strength are likely to be lowered, thereby to lower the wear resistance and to increase the wear amount of the tool. On the other hand, when the proportion of the bond phase is lower than the above range, chipping of the tool are likely to occur during the machining because the toughness is poor due to insufficient bond between hard phases.

Any of the above-described two or more solid solutions in the present invention preferably belongs to a B1 type (cubic system). In addition, at least one of the two or more solid solutions is a solid solution having a high Nb or Zr content.

The solid solution having a high Nb or Zr content is a solid solution having a peak intensity of Nb or Zr, which

is 50% or more, preferably 50-120% of a peak intensity of W, in energy-dispersive X-ray diffraction. When the peak intensity of Nb or Zr is 50% or less of that of W, the content of W becomes relatively high. Therefore, the hardness of the alloy can not be enhanced, thereby making it impossible to exhibit high wear resistance and plastic deformation resistance.

An area ratio of the solid solution having a high Nb or Zr content to the whole solid solution structure is preferably 50% or less. When the area ratio of the solid solution to the whole solid solution structure exceeds 50%, the strength of the alloy is likely to be lowered because of excess precipitation of the solid solution having a high Nb or Zr content, thus increasing the plastic deformation and lowering chipping resistance of the tool. The area ratio must not be 0%. When the area ratio of the solid solution to the whole solid solution structure is 0%, the solid solution having a high Nb or Zr content is not precipitated, thereby to lower the wear resistance and to increase the wear amount of the tool.

The area ratio can be determined in the following manner. First, the cutting tool is cut at an arbitrary portion and the cross section thereof is ground and polished to obtain a mirror-like surface, and then this mirror-like surface portion is observed by an electron microscope

(backscattered electron image). In the resulting photograph of the backscattered electron image, the solid solution having a high Nb or Zr content and the other solid solution differ in color because of a difference in atomic number and atomic weight of the elements constituting the composition of the solid solution. As a result, both solid solutions can be identified. Thus, it is made possible to determine the ratio of the area (area ratio) of the solid solution having a high Nb or Zr content to the whole solid solution structure by measuring the area of both solid solutions in an arbitrary region ($20\text{ }\mu\text{m} \times 20\text{ }\mu\text{m}$) using the image analysis method.

The term "solid solution other than the solid solution having a high Nb or Zr content" refers to a solid solution of the metal other than Nb and Zr, i.e. one or more metals of Ti, V, Cr, Mo, Hf and Ta, and WC and/or a solid solution of Nb or Zr in a low content, and WC. Regarding the solid solution which does not contain Nb or Zr or which contains Nb or Zr in a low content, the peak intensity of Nb or Zr is 50% or less, preferably 0-20% of the peak intensity of W, in energy-dispersive X-ray diffraction.

In the present invention, the two or more solid solutions are preferably contained in the cemented carbide in the proportion within a range from 0.5 to 10% by volume. When the content of the whole solid solution exceeds the

above range, the mechanical strength of the cutting tool is lowered because the solid solution has intrinsically brittleness, thereby increasing the plastic deformation and lowering chipping resistance of the tool. On the other hand, 5 when the content of the whole solid solution is lower than the above range, a cemented carbide classified into so-called K series is obtained and the characteristics at high temperature of the resulting cutting tool are lowered, thereby making it hard to machine hardly machinable 10 materials. More preferably, the two or more solid solutions may be contained in the cemented carbide in the proportion within a range from 2 to 6% by volume.

An average grain size of the solid solution phase is preferably 5 μm or less, and more preferably 3 μm or less. 15 Also, the average grain size of the solid solution having a high Nb or Zr content is preferably 5 μm or less, and more preferably 3 μm or less. When the average grain size of the solid solution phase exceeds 5 μm , the strength of the whole alloy is likely to be lowered because the wettability 20 of the precipitated solid solution with the bond phase becomes inferior. The average grain size of the solid solution having a high Nb or Zr content may be more preferably 2 μm or less.

The average grain size of WC grains constituting the 25 hard phase may be preferably within a range from 0.5 to 5

μm , and more preferably from 0.5 to 2 μm .

A coating layer may be formed on the surface of the cutting member of the present invention. The coating layer is a single- or multi-layer made of at least one selected from MC, MN, MCN, TiAlN , ZrO_2 and Al_2O_3 , provided that "M" denotes metal of the groups 4a, 5a or 6a in the Periodic Table, and MC, MN and MCN denote carbide, nitride and carbonitride of metal mentioned above, respectively, such as TiC, TiN or TiCN. The coating layer is preferably formed in a thickness within a range from about 0.1 to 20 μm by the CVD process, PVD process or the like.

The cutting member of the present invention is produced by weighing WC powder, one or more powders of carbides, nitrides and carbonitrides of metals of the groups 4a, 5a and 6a in the Periodic Table, and powder of a metal of the iron group such as Co as raw powders, mixing and pulverizing the powders, forming the mixed powders into a green body having a desired shape using a conventional known forming method such as pressing, and firing the resulting green body. The firing is conducted at a temperature within a range from 1623 to 1773 K under a pressure within a range from 10^{-1} to 10^{-3} Torr for 10 minutes to 2 hours. The cemented carbide thus formed is optionally provided with a coating layer on the surface. The coating layer is formed after washing the cemented carbide.

Preferably, the amount of the WC powder is within a range from 70 to 95% by weight and the amount of the powders of metals of the groups 4a, 5a and 6a in the Periodic Table is within a range from 0.1 to 20% by weight and, furthermore, 5 the amount of the powder of the metal of the iron group is within a range from 5 to 20% by weight. More preferably, the amount of the WC powder is within a range from 85 to 95% by weight and the amount of the powders of metals of the groups 4a, 5a and 6a in the Periodic Table is within 10 a range from 0.5 to 5% by weight and, furthermore, the amount of the powder of the metal of the iron group is within a range from 5 to 10% by weight.

To precipitate the solid solution having a high Nb and/or Zr content, the amount of carbides, nitrides or 15 carbonitrides of Nb and/or Zr contained in the compound of the metal of the groups 4a, 5a or 6a in the Periodic Table may be controlled. Specifically, to obtain the desired area ratio, the amount of the Nb compound and/or Zr compound is controlled so that the proportion (% by weight) of the 20 compound of the metal of the groups 4a, 5a or 6a in the Periodic Table is almost the same as the desired area ratio.

As described above, the cutting member of the present invention has improved wear resistance and plastic deformation resistance to hardly machinable materials such 25 as stainless steel and is also superior in chipping

resistance. Thus, it is made possible to improve the cutting performance and to prolong service life of the cutting member.

5

EXAMPLES

The cutting member of the present invention will now be described in detail by way of examples.

Example

The respective inorganic powders as raw powders shown
10 in Table 1 were weighed in the proportion shown in the same table and, after mixing and pulverizing the powders, the mixed powders were formed into a green body having a desired shape of a cutting tool (CNMG432) by pressing and the green body was fired at 1773 K under reduced pressure of 10^{-2} Torr
15 or less for one hour.

The resulting sintered body was cut at an arbitrary portion and the cross section thereof is ground and polished to obtain a mirror-like surface, and then a backscattered electron image was observed by an electron microscope. Then,
20 the ratio of the area (area ratio) of the solid solution having a high Nb and/or Zr content to the whole solid solution structure was determined from the photograph of the backscattered electron image on the basis of difference in color between the solid solution having a high Nb and/or
25 Zr content and the other solid solution in arbitrary region

(20 μm \times 20 μm) using the image analysis method.

Using a X-ray microanalyzer (energy-dispersive X-ray diffractometer, PV9800 manufactured by EDAX CO.), X-ray diffraction was conducted. A peak intensity of Nb or Zr
5 in the solid solution having a high Nb and/or Zr content and a peak intensity of W were measured, thereby to determine a peak intensity ratio (%) according to the following formula.

$$\text{Peak intensity ratio (\%)} = (\text{peak intensity of Nb or Zr}) \times 100 / (\text{peak intensity of W}).$$

10

A graph of X-ray diffraction of a solid solution having a high Zr content obtained in the sample No. 4 is shown in Fig. 1. A graph of X-ray diffraction of a solid solution having a high Nb content obtained in the sample No. 7 is
15 shown in Fig. 2.

The measurement results are also shown in Table 1.

Table 1

Sample No.	Composition (% by weight)					Proportion of Nb, Zr compounds (% by mole)	Area ratio (%)	Peak intensity ratio (%)	Average grain size of solid solution (μm)
	WC	Co	TiC	TaC	NbC				
1	88	9.4	2.6 % in total amount			0	0	0	0.6
※2	88	9.4	"			20	15	60	0.8
※3	88	9.4	"			45	45	120	0.8
※4	88	9.4	"			60	70	160	1.2
5	91	6.4	"			5	0	5	0.5
※6	91	6.4	"			20	10	50	0.7
※7	91	6.4	"			40	50	85	0.8

The symbol ※ denotes a sample within the scope of the present invention.

The proportion of Nb, Zr compounds denotes the proportion of a Nb compound or a Zr compound in a β phase component, excluding WC and Co.

The surface of the resulting each sintered body was coated with a titanium carbonitride film having a thickness of about 5 μm by the CVD process to obtain a cutting tool made of a coated cemented carbide.

5 Test Example

Using the resulting cutting tool, a stainless steel was cut. Then, a cutting time required for an amount of any of flank wear (caused by direct friction of a material to be machined on flank face of a tool) and nose wear
10 (occurred at a nose angle portion of a tool) to reach a value to be judged as service life of the tool (i.e. average flank wear amount: 0.2 mm, average nose wear amount: 0.2 mm) was measured. However, when the cutting time reached eight
15 minutes before the wear amount does not reach the value corresponding to service life of the tool, the wear amount after cutting for eight minutes was measured.

The cutting conditions are as follows. During the cutting, a water-soluble cutting solution was used.

Material to be cut:	stainless steel (SUS304)
20 Shape of tool:	CNMG120408
Cutting rate:	200 m/minute
Feed rate:	0.3 mm/rev
Depth of cut:	2 mm

To evaluate the chipping resistance of each cutting
25 tool, the high-temperature deflective strength test was

conducted. The test was conducted under the same conditions as those described above, except that the thickness of the test piece was changed to 2.5 mm and the span of three-point bending was changed to 10 mm in accordance with JIS R 1601 using a Tensilon universal testing machine UCT30T manufactured by Orientec Co., a high-temperature defluctive strength was determined. It is evaluated that the chipping resistance is good when the high-temperature defluctive strength is 900 MPa or more.

10 These test results are shown in Table 2. In Table 2, the symbol \times denotes "failure", the symbol \bigcirc denotes "good" and the symbol \odot denotes "excellent" in the respective evaluations.

Table 2

Sample No.	Flank wear (8 min.)		Nose wear (8 min.)		High-temperature deflective strength test	
	Evaluation	Wear amount (mm)	Evaluation	Wear amount (mm)	Evaluation	Strength (MPa)
1	○	0.19	X	7 min.*	X	760
※2	◎	0.11	◎	0.15	○	950
※3	◎	0.10	◎	0.13	◎	1100
※4	○	0.16	○	0.19	◎	1050
5	○	0.16	○	0.19	X	830
※6	◎	0.09	◎	0.12	◎	1040
※7	◎	0.06	◎	0.10	◎	1150

The symbol ※ denotes a sample within the scope of the present invention.

The symbol * denotes the time required for the wear amount to reach 0.2 mm.

As is apparent from the results of the wear test shown in Table 2, the sample No. 1 was inferior in wear resistance and the nose wear amount reached the value corresponding to service life within a short time because the solid
5 solution having a high Nb or Zr content was not precipitated.

To the contrary, the samples Nos. 2, 3, 4, 6 and 7 containing the solid solution having a high Nb or Zr content, particularly the samples Nos. 2, 3, 6 and 7, exhibited excellent wear resistance and plastic deformation
10 resistance during the cutting of stainless steel.

As is apparent from the results of the high-temperature deflection strength test shown in Table 2, the samples Nos. 2, 3, 4, 6 and 7 according to the present invention had a high high-temperature deflection strength.

What is claimed is:

1. A cutting member comprising WC, two or more solid solutions of WC and compounds selected from carbides, nitrides and carbonitrides of metals of the groups 4a, 5a
5 and 6a in the Periodic Table, and at least one metal of the iron group, wherein at least one of the two or more solid solutions is a solid solution having a high Nb or Zr content.

2. The cutting member according to claim 1, wherein the solid solution having a high Nb or Zr content is a solid
10 solution having a peak intensity of Nb or Zr, which is more than 50% of a peak intensity of W, in energy-dispersive X-ray diffraction.

3. The cutting member according to claim 1, wherein an area ratio of the solid solution having a high Nb or Zr
15 content to the whole solid solution structure is 50% or less.

4. The cutting member according to claim 1, wherein the two or more solid solutions have an average grain size of 5 μm or less.

5. The cutting member according to claim 1, wherein
20 a single- or multi-coating layer is formed on the surface.

6. The cutting member according to claim 5, wherein the single- or multi-coating layer comprises at least one selected from MC, MN, MCN, TiAlN, ZrO₂ and Al₂O₃, provided that "M" denotes a metal of the group 4a, 5a or 6a in the
25 Periodic Table, and MC, MN and MCN denote carbide, nitride

and carbonitride of the metal, respectively.

7. The cutting member according to claim 6, wherein the coating layer comprises at least one selected from TiC, TiN and TiCN.

5 8. A method for cutting metal, which comprises a step for cutting metal with the cutting material according to claim 1.

9. The method according to claim 8, wherein said metal is hardly machinable metal.

10 10. The method according to claim 9, wherein said hardly machinable metal is stainless steel.

ABSTRACT OF THE DISCLOSURE

The cutting member comprises WC, two or more solid solutions of WC and compounds selected from carbides, nitrides and carbonitrides of metals of the groups 4a, 5a
5 and 6a in the Periodic Table, and at least one metal of the iron group; and at least one of the two or more solid solutions being a solid solution having a high Nb or Zr content, whereby the wear resistance and plastic deformation resistance are improved in case of cutting
10 hardly machinable materials such as stainless steel, thereby making it possible to prolong the service life of the cutting member.

Fig. 1

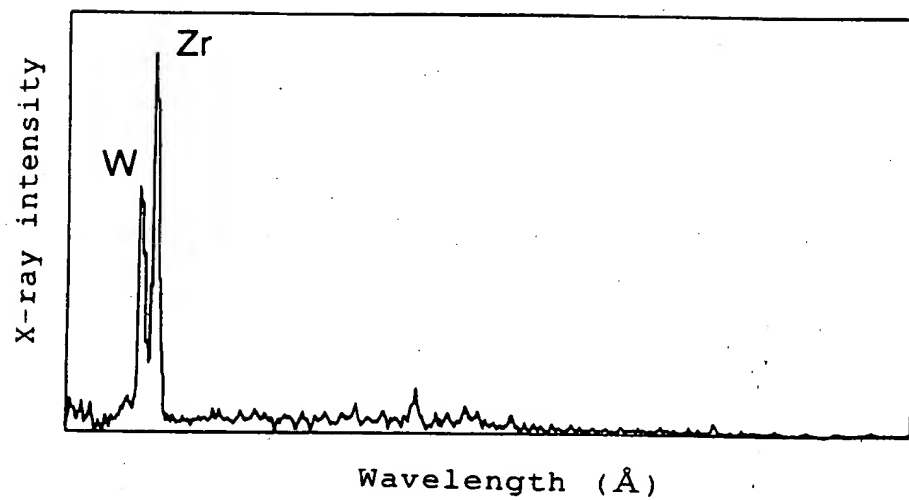


Fig. 2

